


NOTE:
AFTER NUTS ARE TIGHTENED, CONCRETE ANCHORS SHALL NOT PROJECT MORE THAN 3/8" ABOVE NUT PEEN EXPOSED BOLT ENDS

- NOTES**
- MEDIAN FENCING SHALL CONFORM TO SECTION 511.
 - ALL POSTS SHALL BE SET AT 10'-0" CENTER TO CENTER
 - PULL POSTS ARE REQUIRED AT 250' INTERVALS.
 - TWO (2) 3/8" DIA BRACE RODS WITH TURNBUCKLES ARE REQUIRED AT EACH PULL POST
 - ONE (1) 3/8" DIA BRACE ROD WITH TURNBUCKLE & CLEVIS IS REQUIRED AT EACH END POST
 - CONCRETE ANCHORS FOR FASTENING BASE PLATES TO TOP OF BARRIER SHALL BE POLYESTER RESIN BONDED STAINLESS STEEL ANCHORS
 - DRILLED HOLES FOR CONCRETE ANCHORS, SHALL BE 6 1/2" DEEP.

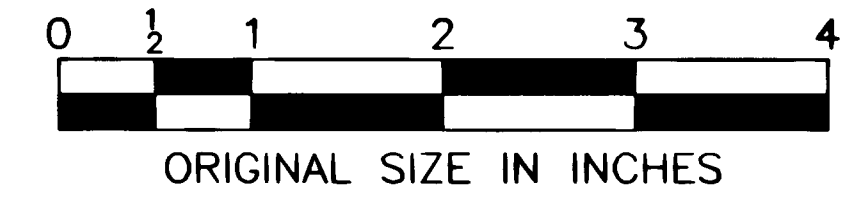

App	No	DATE	REVISION
		4/05	REISSUED, CONFORMS TO 2004 SPECS

**NEW JERSEY TURNPIKE AUTHORITY
NEW JERSEY TURNPIKE**

MEDIAN BARRIER FENCING DETAILS

OFFICE OF THE CHIEF ENGINEER
WOODBIDGE, NEW JERSEY

2004 STANDARD DRAWING
MF-2