


NOTE A
ANCHOR BOLTS SHALL BE ASTM A-307 GALVANIZED, ASTM A-123. ANCHOR BOLTS SHALL BE 3/4" DIAMETER, 2'-6" LONG WITH A 12"-90° BEND. USE HEX NUT AND CIRCULAR WASHER, GALVANIZED TO ASTM A-153.

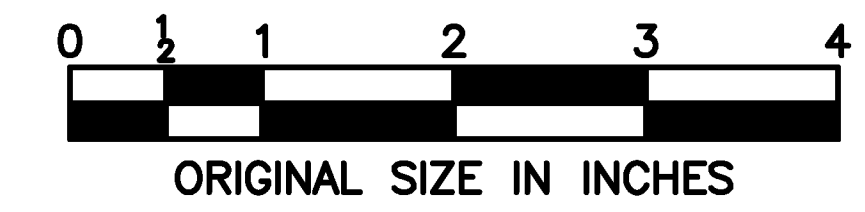

**NEW JERSEY TURNPIKE AUTHORITY
NEW JERSEY TURNPIKE**

**DATIM ENCLOSURE
PLAN AND SECTIONS**

OFFICE OF THE CHIEF ENGINEER
WOODBRIDGE, NEW JERSEY

2010 STANDARD
DRAWING TB-9

APP. NO.	02/10	DATE	ORIGINAL DRAWING
			REVISION

CONTRACT NO.

SHEET NO.

OF