

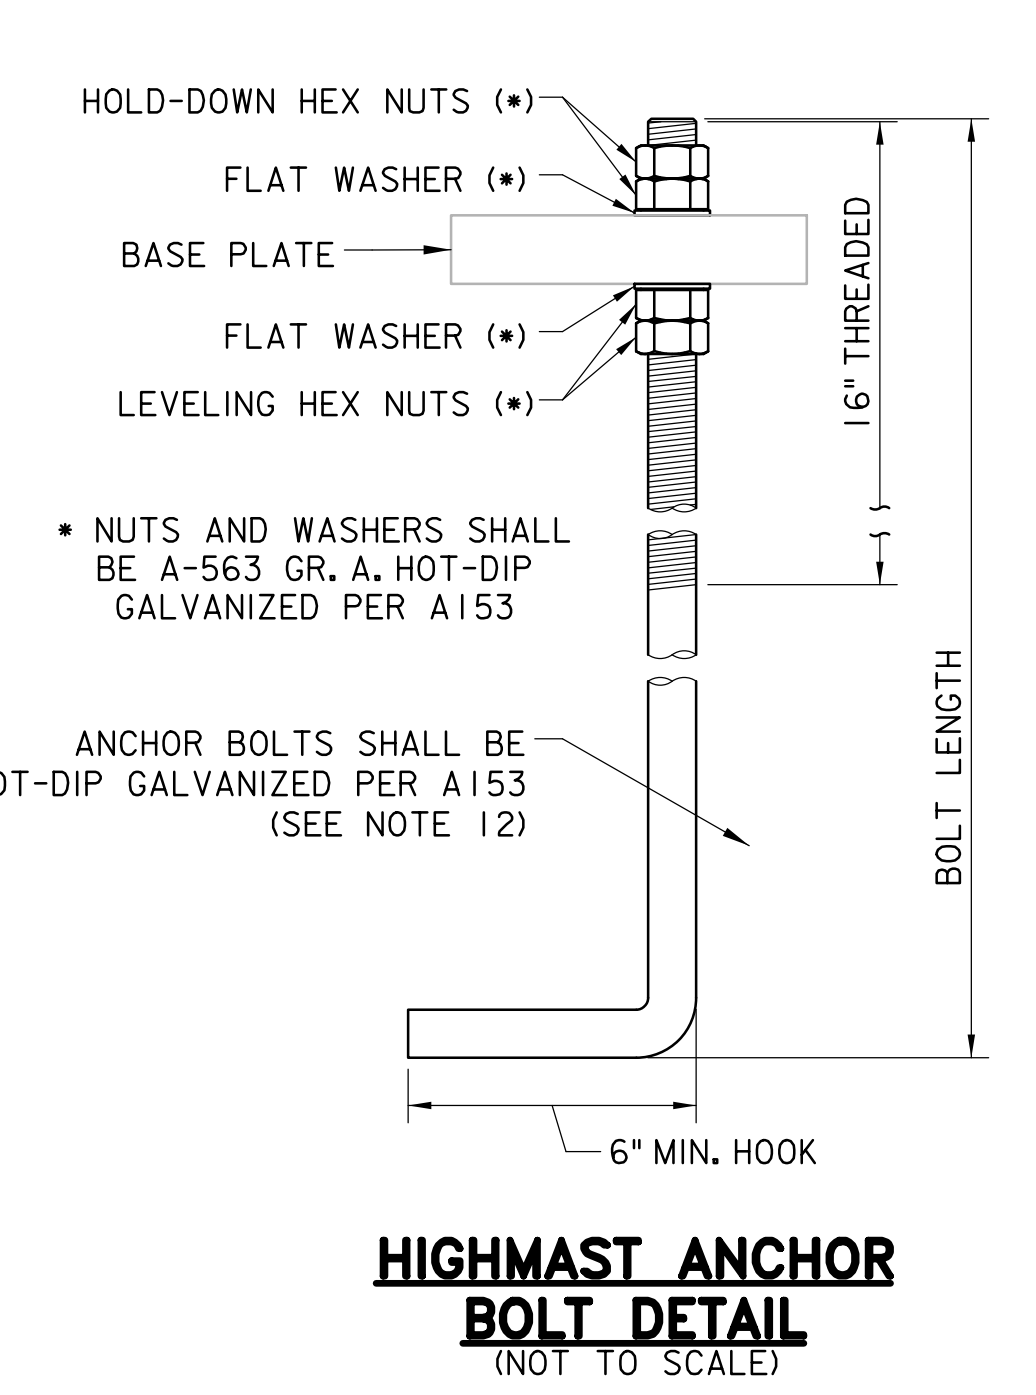
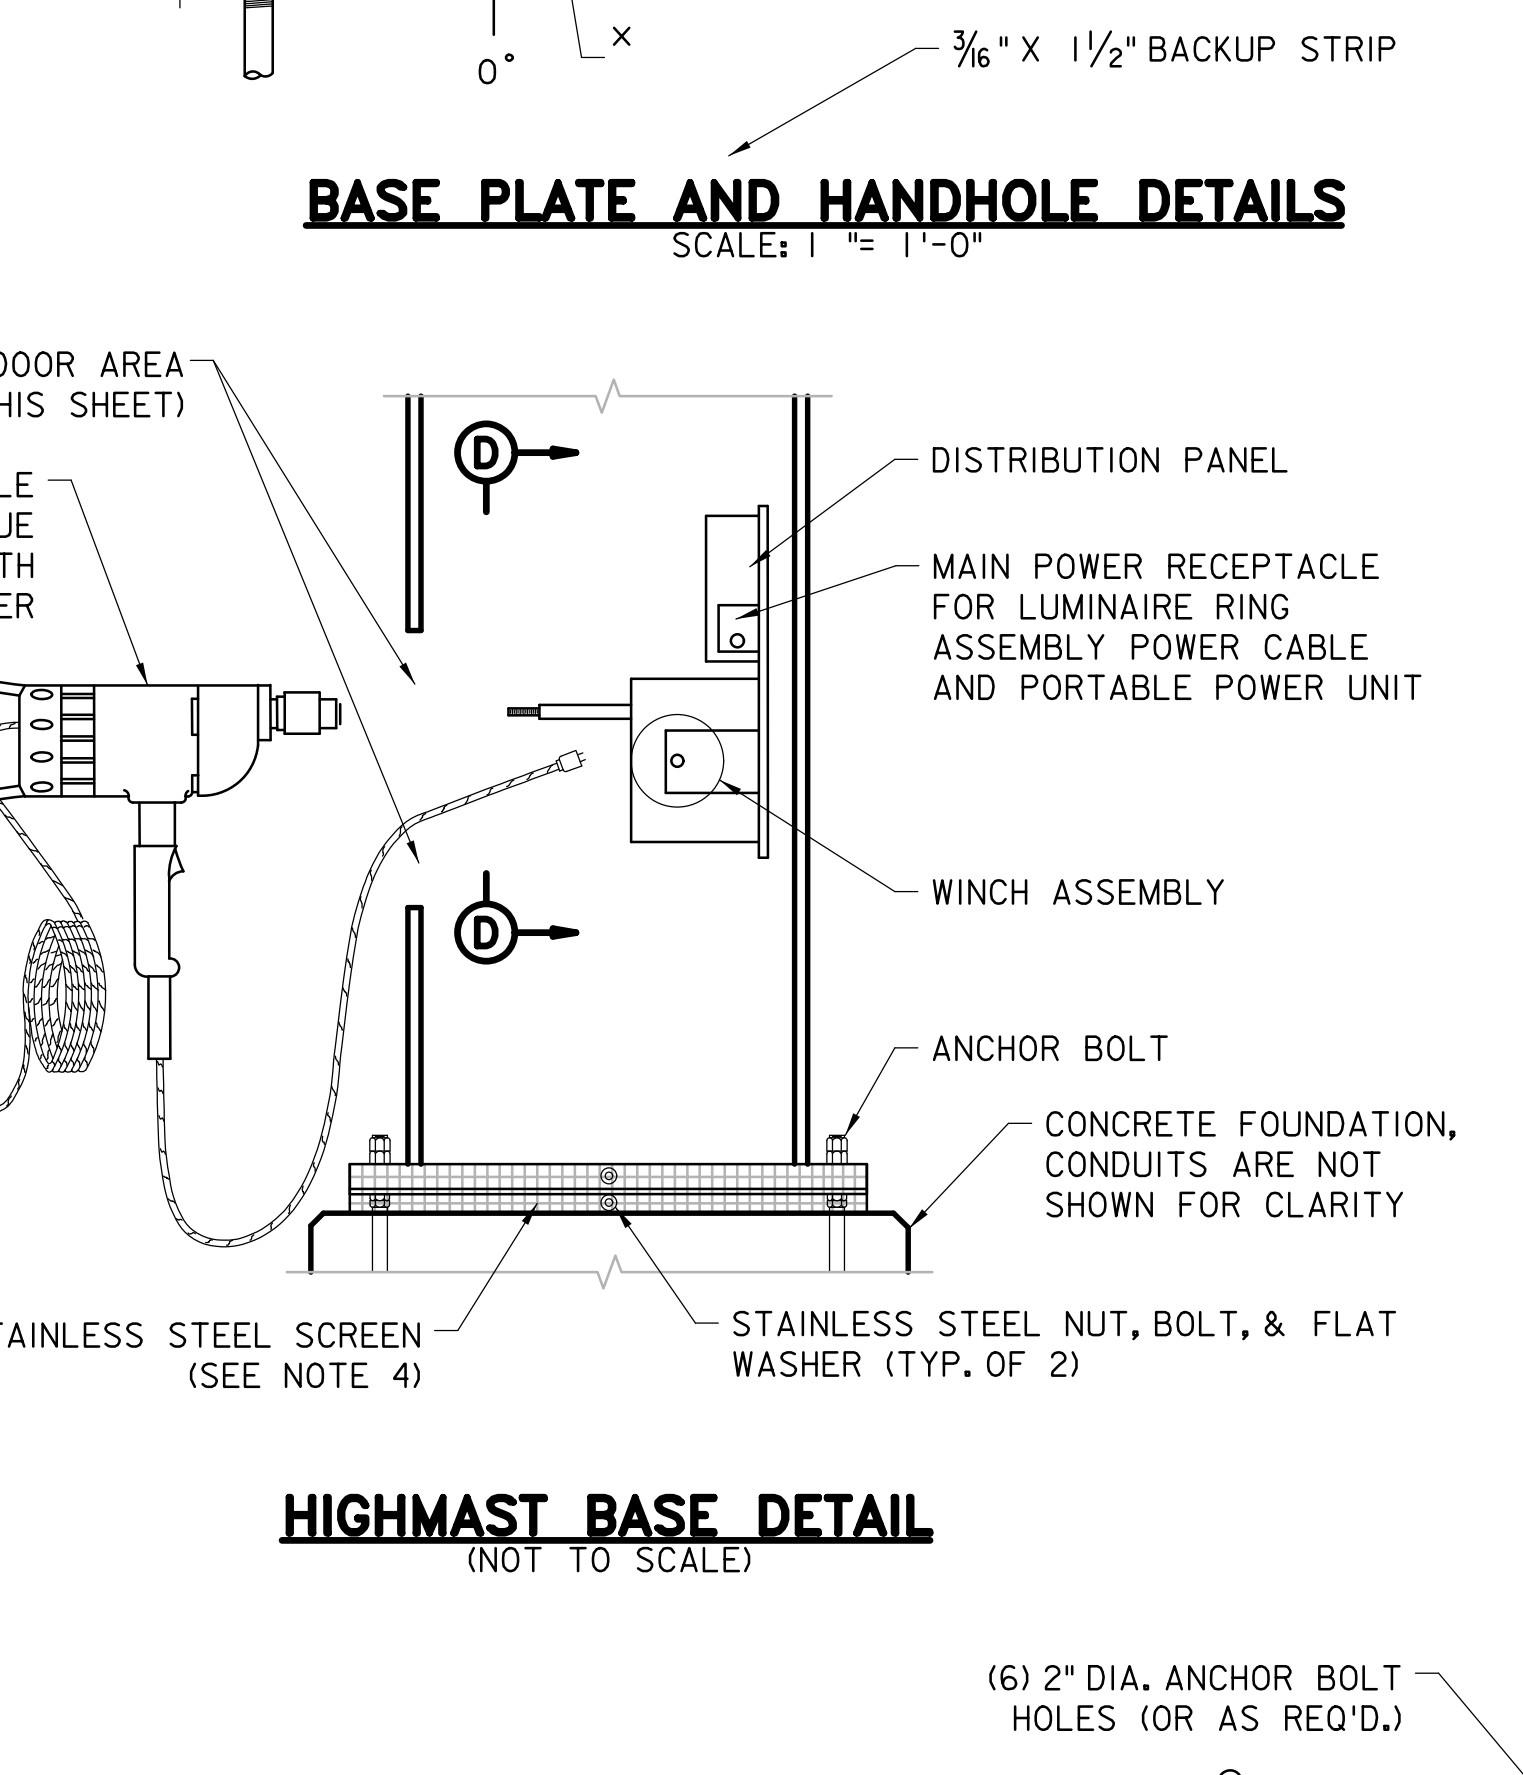
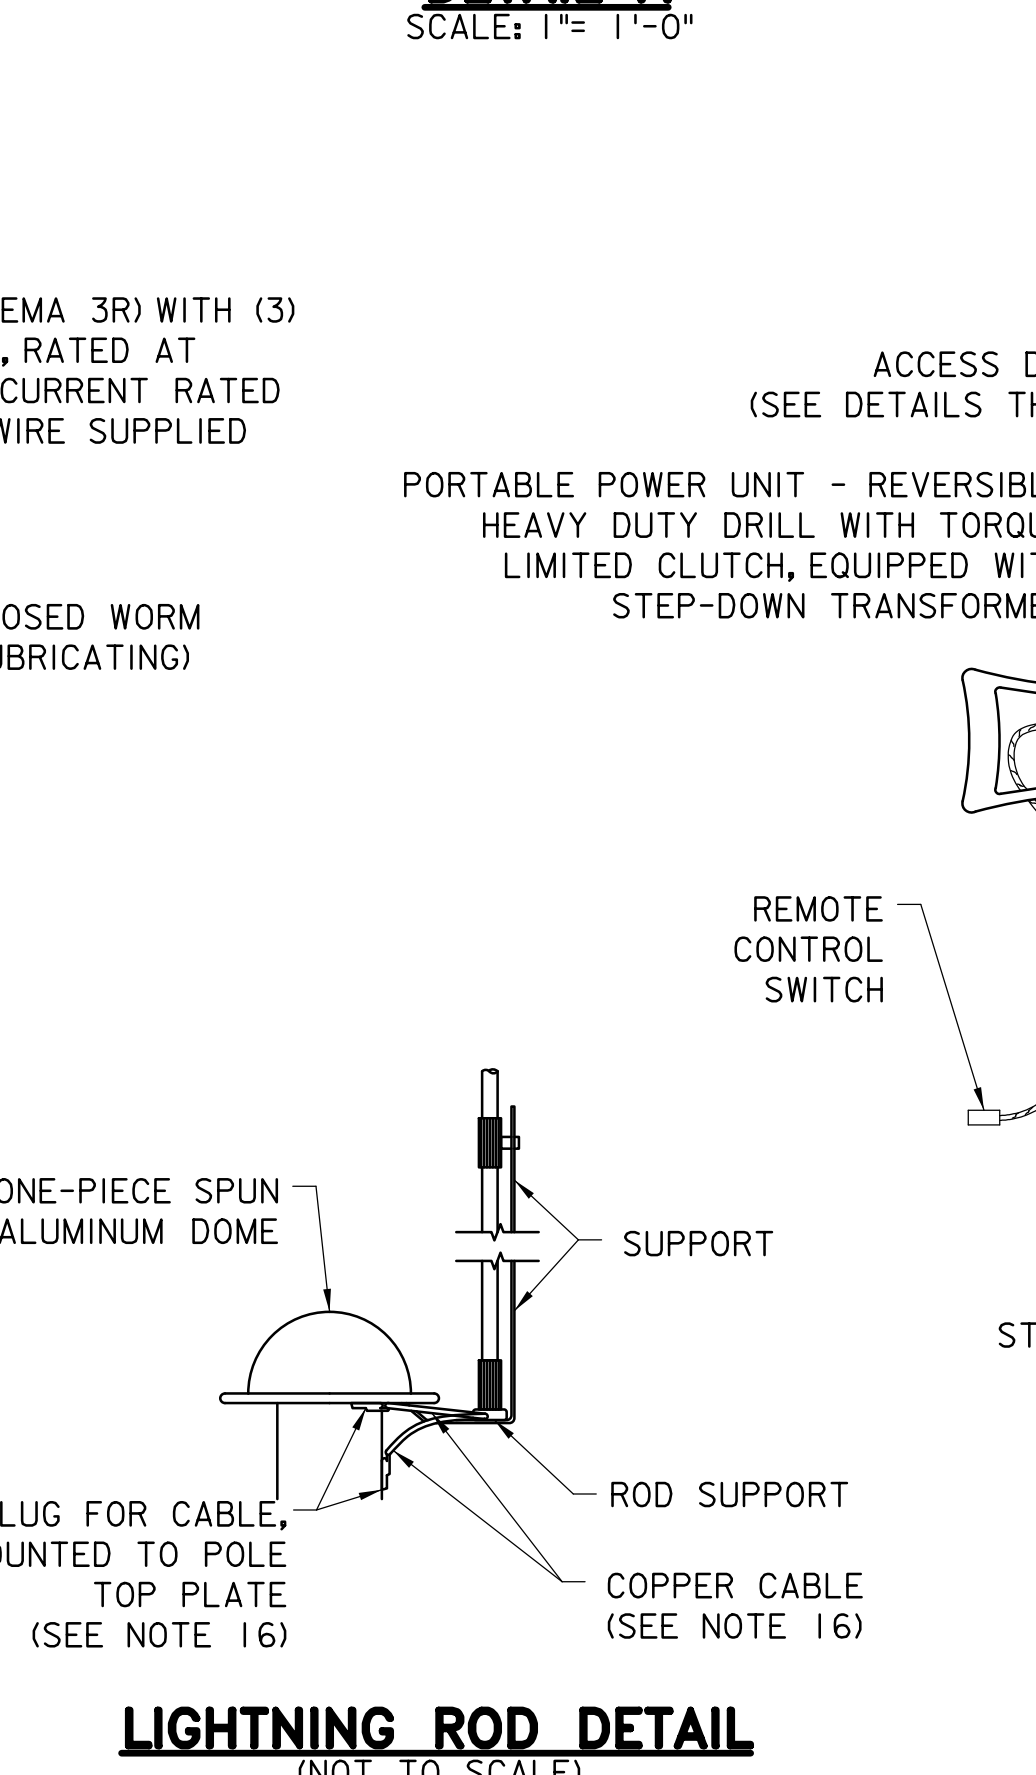
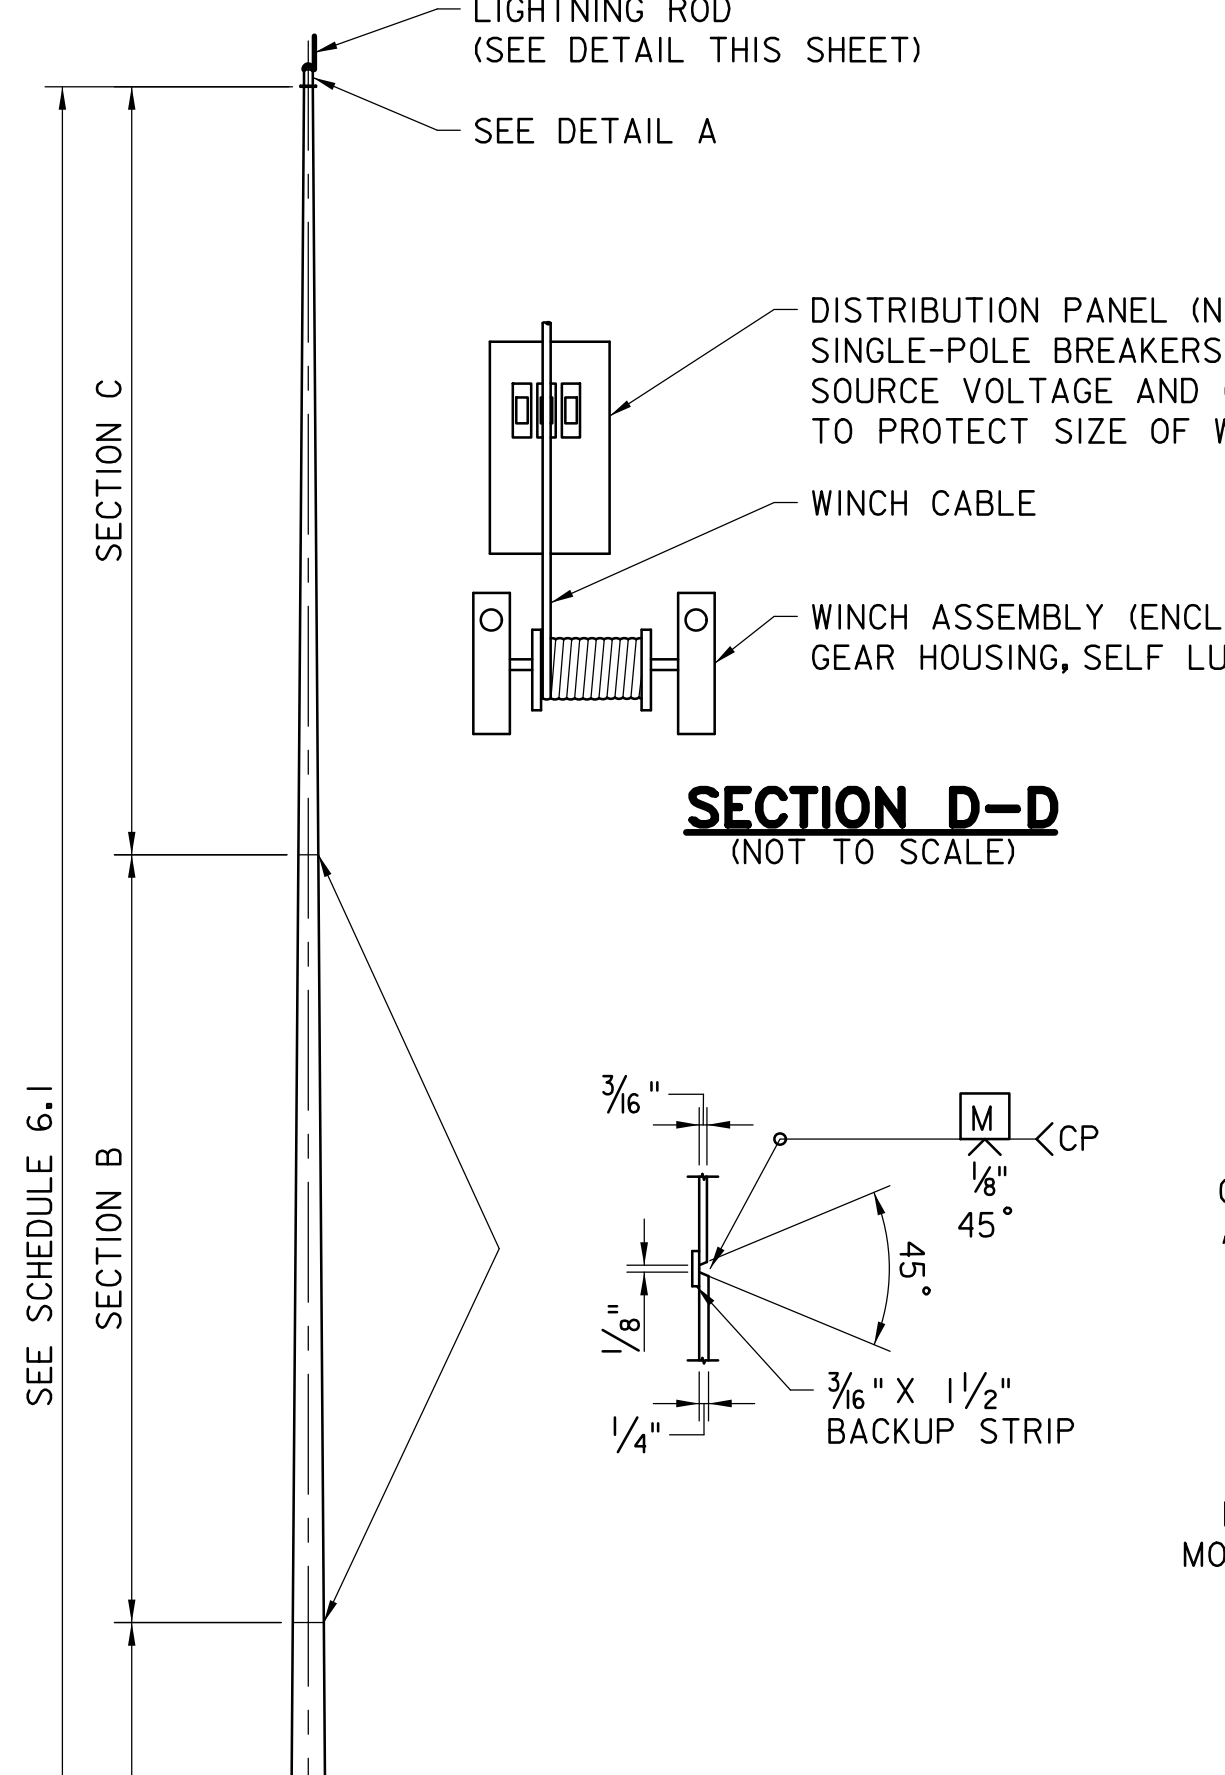
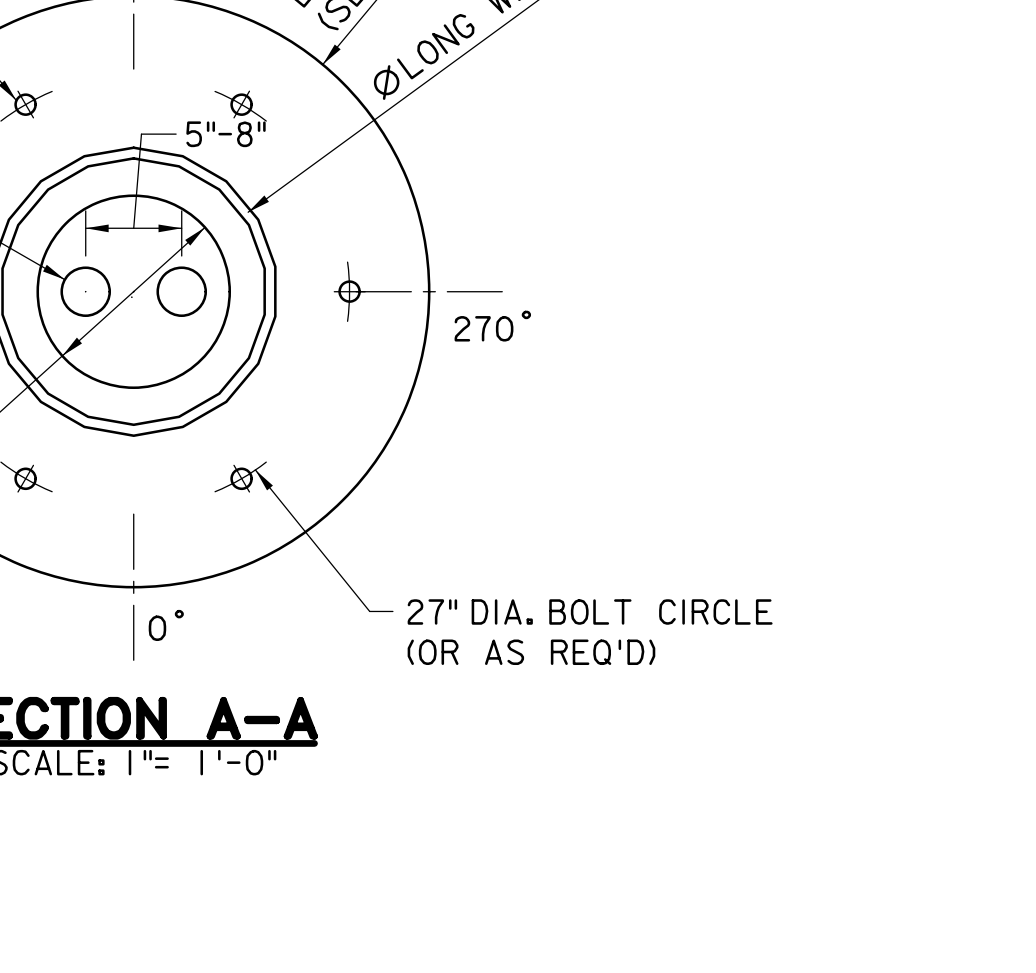
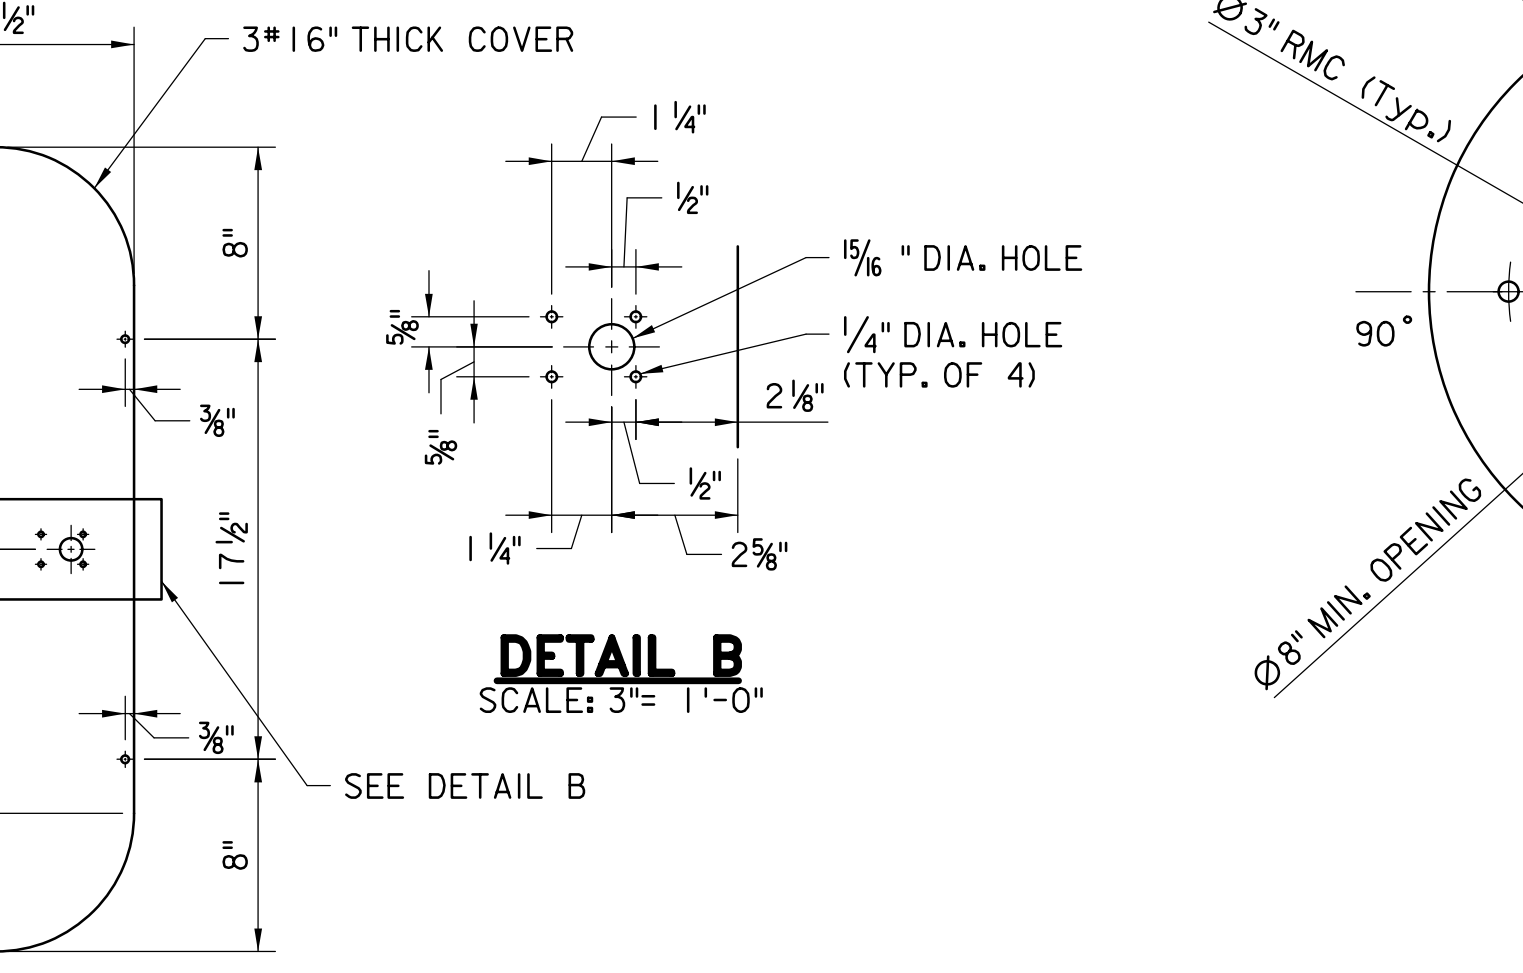


SCHEDULE 6.1													
HIGHMAST LIGHTING STD.		SHAFT DIMENSIONS				ANCHOR BOLTS			BASE PLATE				
TYPES	HEIGHT	SECTION	BOTTOM O.D.	TOP O.D.	LENGTH	WALL THICKNESS	QUAN.	DIA.	LENGTH	DIA.	BOLT CIRCLE	THICK	BOLT PROJ.
L-HR#-60	60'	A	17.20"	11.70"	31.75'	0.25"	6	1.50"	54" +6"	27.50"	23.00"	1.00"	7.00"
		B	12.50"	7.30"	30.00'	0.25"							
L-HR#-80	80'	A	20.65"	11.70"	51.75'	0.25"	6	1.50"	84" +6"	30.50"	26.00"	1.00"	7.00"
		B	12.50"	7.30"	30.00'	0.255"							
L-HR#-100	100'	A	23.70"	17.30"	37.00'	0.25"	6	1.75"	84" +6"	34.50"	29.00"	1.50"	8.50"
		B	18.07"	16.67"	37.00'	0.25"							
		C	12.50"	7.30"	30.00'	0.25"							
L-HR#-120	120'	A	26.50"	21.07"	30.14'	0.313"	8	2.00"	120" +6"	37.00"	32.00"	3.00"	10.00"
		B	22.08"	13.58"	47.24'	0.188"							
		C	14.14"	5.65"	48.67'	0.188"							

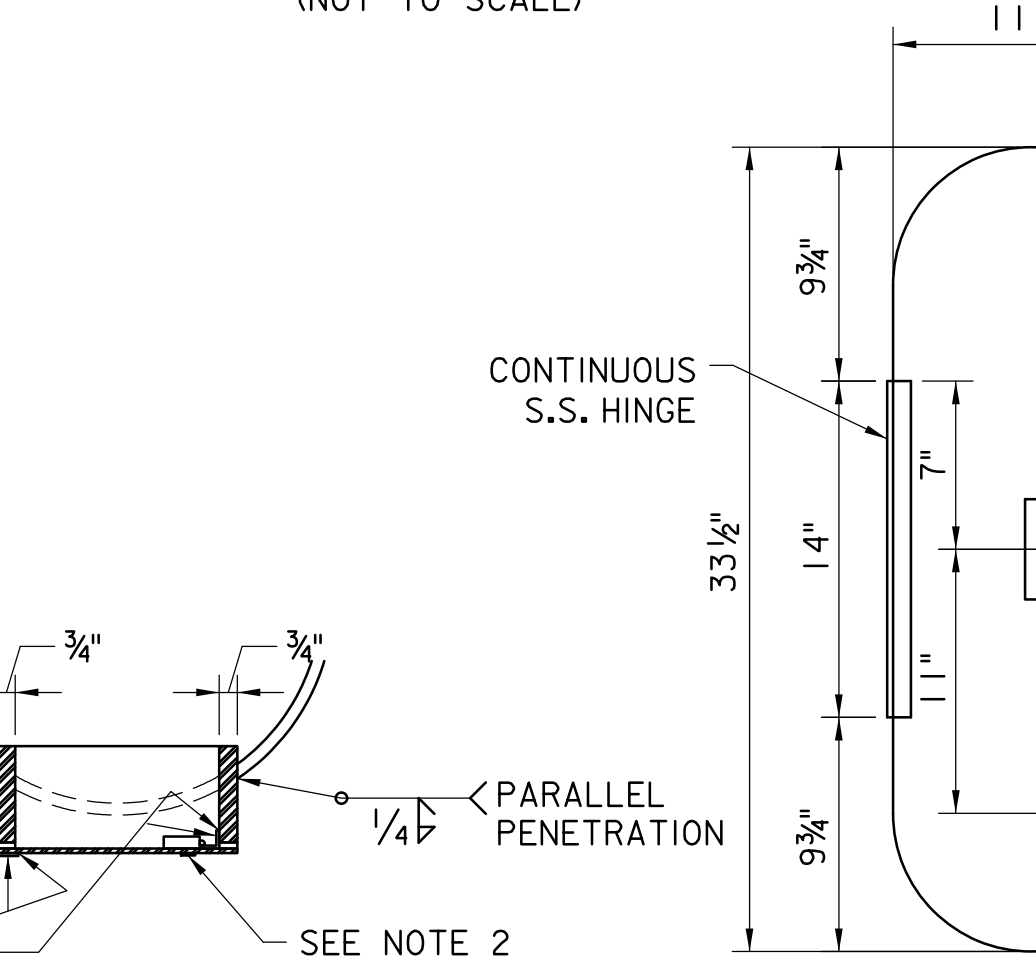

- NOTES**
- ALL HIGHMAST POLES SHALL BE DESIGNED AND FABRICATED TO ADEQUATELY SUPPORT THE WEIGHT OF TWELVE (12) LUMINAIRES, HEAD FRAME OR RING ASSEMBLY, PROJECTED AREA, AND TO WITHSTAND 110 MPH WIND VELOCITY WITH 1.3 GUST FACTOR. THE MANUFACTURER SHALL FURNISH CERTIFICATION THAT HIGHMAST POLES ARE TO BE MANUFACTURED IN ACCORDANCE WITH CURRENT AASHTO STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS.
 - LOCK SHALL BE AS SPECIFIED IN THE QUALIFIED PRODUCTS LIST AND KEYED FOR CORBIN KEY NO.2.
 - DETAILS ARE SCHEMATIC. MODIFICATIONS ARE PERMITTED. ALL HIGHMAST LIGHTING EQUIPMENT INCLUDING FOUNDATION DETAILS SHALL BE APPROVED BY THE ENGINEER THROUGH THE SHOP DRAWING PROCESS PRIOR TO ORDERING, FABRICATION, OR ACCEPTANCE OF ANY HIGHMAST INSTALLATION.
 - A STAINLESS STEEL SCREEN, DOUBLE-WRAPPED AROUND THE BASE OF THE POLE IS REQUIRED. THE STAINLESS SCREEN SHALL HAVE NO MORE THAN 1/2" OPENINGS, AND SHALL BE HELD TOGETHER WITH STAINLESS STEEL NUTS, BOLTS, AND FLAT WASHERS.
 - ALL WELDING SHALL BE DONE WITH E-80T-1 WIRE.
 - POLE SHALL BE FABRICATED FROM HIGH-STRENGTH, LOW-ALLOY STEEL CONFORMING TO ASTM A572, GRADE 65. THE POLE FINISH SHALL BE HOT-DIP GALVANIZED PER ASTM A-123.
 - SLIP JOINTS ARE NOT PERMITTED IN THE MANUFACTURE OF THE POLE.
 - BOLT HEADS AND NUTS SHALL BE HEXAGONAL.
 - GROUTING UNDER THE POLE IS NOT PERMITTED.
 - MANUFACTURER SHALL DETERMINE THE PROPER LENGTH TO PROVIDE A POSITIVE SEAT OF THE HEAD FRAME ASSEMBLY.
 - EACH POLE SECTION SHALL HAVE ONLY ONE LONGITUDINAL SEAM.
 - ANCHOR BOLT MATERIAL SHALL BE ASTM A36, M55, WITH A 55,000 YIELD MIN.
 - THE MANUFACTURER SHALL SUPPLY ALL OTHER HARDWARE WHICH IS NECESSARY TO INSTALL THE HIGHMAST ASSEMBLY ON FOUNDATION.
 - HIGHMAST LIGHTING STANDARDS SHALL BE USED ONLY WHERE APPROVED IN ADVANCE OF DESIGN BY THE AUTHORITY.
 - ALL STAINLESS STEEL HARDWARE SHALL BE TYPE 304.
 - THE LIGHTNING ROD SHALL BE ATTACHED TO THE POLE WITH A GROUNDING LUG EITHER UNDERNEATH THE POLE TOP DOME OR DIRECTLY TO THE POLE SHAFT. WHEN CONNECTED TO THE POLE SHAFT THE GROUNDING LUG SHALL BE WELDED TO THE POLE. COPPER CABLE CONNECTING THE ROD TO THE POLE SHALL BE BARE-COPPER.

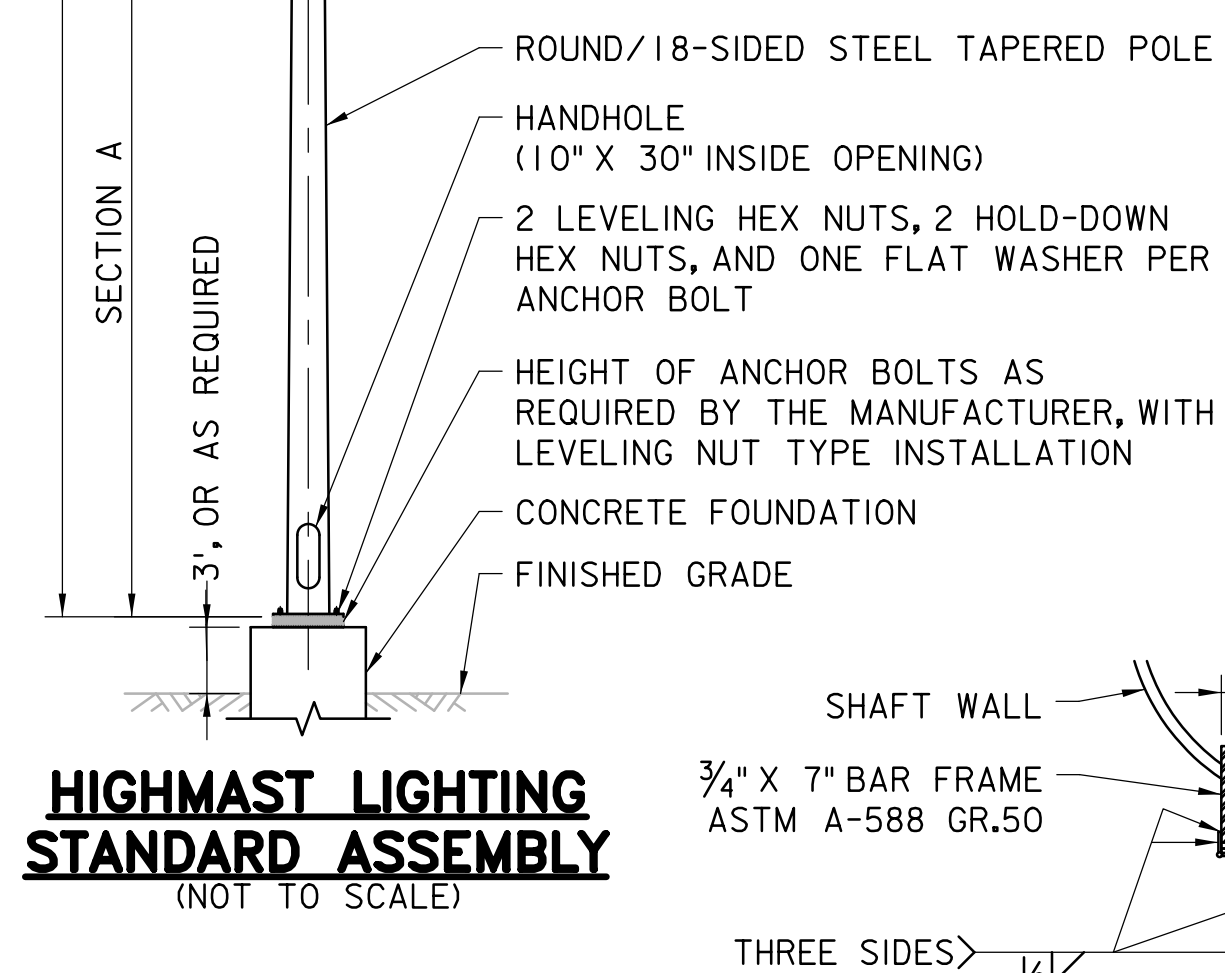

NEW JERSEY TURNPIKE AUTHORITY
NEW JERSEY TURNPIKE GARDEN STATE PARKWAY
 STANDARD DRAWINGS



HIGHMAST LIGHTING STANDARD DETAILS - 1

OFFICE OF THE CHIEF ENGINEER
 NEW JERSEY TURNPIKE AUTHORITY
 WOODBRIDGE, NEW JERSEY

STANDARD DRAWING

0 REISSUED DRAWING 09/21
 REV. DESCRIPTION DATE

E-06

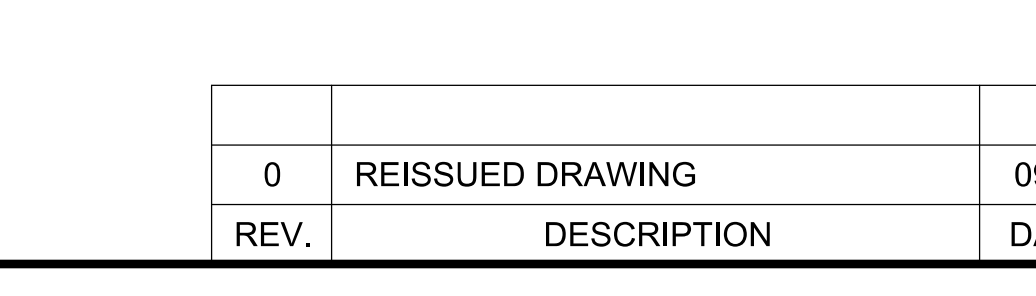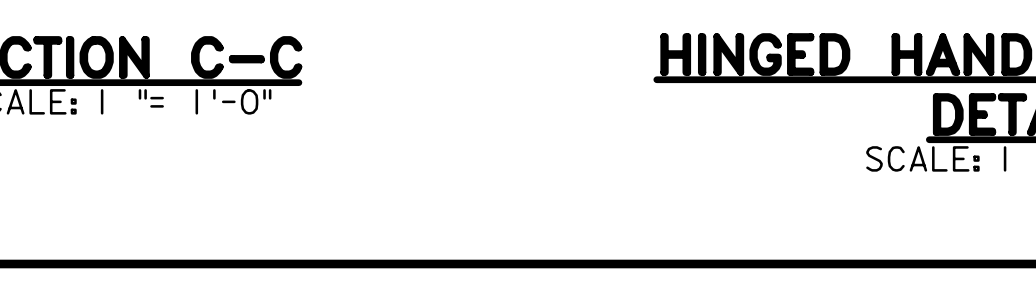

CONTRACT NO. SHEET NO. OF